



# Solar Ready Electric Tank



Become part of the  
solution..



250L<sup>1</sup>

315L


400L<sup>1</sup>

## FEATURES & BENEFITS:

- Solar Ready Electric Tank
- Designed for the Australian market
- Quality vitreous enamel lined tank
- Backed by the Apricus National Guarantee
- 5 Year Warranty



MODEL		250L <sup>1</sup>	315L	400L <sup>1</sup>
Rated Capacity	litres	250	315	400
Physical Volume	litres	274	343	445
Height	mm	1406	1700	1731
Diameter	mm	648	648	731
Thermal Efficiency		98%	98%	98%
Element Height	mm	170	170	190
Weight (Empty)	kg	84	102	150
Inlet Size	in	3/4"	3/4"	3/4"
Valve Connection Size	in	3/4"	3/4"	3/4"
Max Thermat Stat Setting	°C	75	75	75
Dead Band	°C	8	8	8
Heat Element Power	kW	3.6	3.6	3.6
Warranty				
- Cylinders		5 years	5 years	5 years
- Parts & Labour		1 year	1 year	1 year
Safety Valve Setting Pressure				
	kpa	850	850	850
Max Cold Water Pressure	kpa	600	600	600

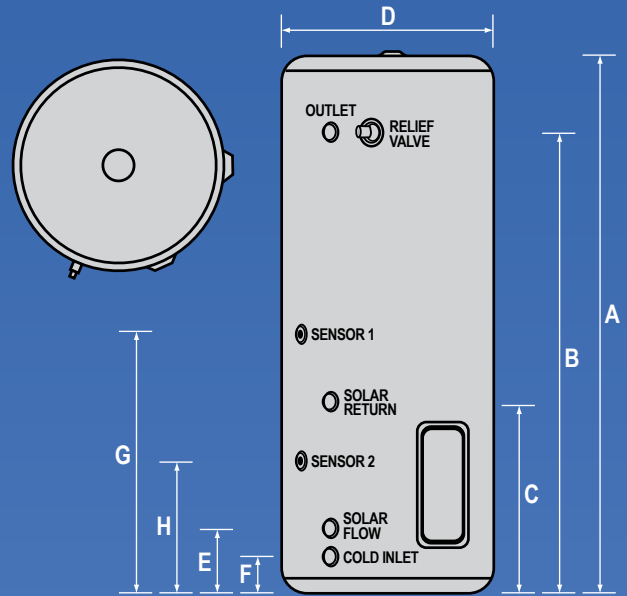

TANK	DIMENSIONS (mm)							
	A	B	C	D	E	F	G	H
250	1388	1167	564	648	174	74	759	369
315	1682	1470	564	648	174	74	841	369
400	1731	1474	564	731	174	74	841	369

<sup>1</sup> 250L & 400L tank coming soon

<sup>2</sup> The solar systems using Apricus solar-ready tanks meet AS2712 standards and are REC modelled



Ph 1300 277 428